

Telsmith TJ3258 TEL-TRAX



Tel-Trax complete with:

3258 Hydraulic Adjust Jaw Crusher:

- Hydraulic adjustment with push button controls
- Tramp-iron relief, automatically returns to setting

60" X 15' [1.5 m x 4.6 m] Heavy Duty Vibrating Grizzly Feeder:

- 5 ft [1.52 m] grizzly bar section with 4 in [101.6 mm] spacing at discharge end
- 1/2 in [13 mm] thick AR steel pan liner
- Dual shaft 220 HF oil lubricated vibrating unit

54" X 45' [1.4 m x 13.7 m] Long Main Discharge Conveyor:

- 3-ply (1/4 in x 1/16 in) belting – vulcanized seam
- Hydraulic raise / lower tail section increases clearance for travel and clean-up
- Discharge height is 10 ft 2 in [3.11 m]

TEL-TRAX Chassis:

- Removable vibrating grizzly feeder skid module:
 - 7yd³ loading hopper
- Caterpillar C-9 Tier III 350 HP diesel engine:
 - 225 gallon fuel tank
- Track undercarriage

Plant Controls:

- Wireless handheld remote control
- On-plant display panel (LCD color monitor)

Optional Plant Controls:

- Automatic grease lubrication for jaw crusher
- Feeder module hydraulic lift package
- Permanent magnet 36 in [914 mm] X 60 in [1524 mm]
- Hydraulic hammer (BTI MBS10-BX10)
 - 1,100 ft-lb class breaker with 10 ft [3 m] boom
 - Hand held remote radio control
- Manual folding hopper extensions
 - Increases hopper capacity to 18yd³
- 30 in [762 mm] X 17 ft [5.18 m] side discharge conveyor
- Dust suppression piping (water supply by others)
- 10 ft [3 m] main conveyor extension
 - Increases discharge height to 14 ft 6 in [4.5 m]
- Lights
- Belt scale



TJ3258 TEL-TRAX


TJ3258 Weights

Base Plant	56,246 kg	118,000 lbs
VGF Module	11,340 kg	25,000 lbs
Conveyor	4,536 kg	12,000 lbs
Total Weight	72,122 kg	155,000 lbs

Note: Weights are approximate and based on a standard track plant. Incorporating additional options will increase the weight.

J3258 Crushing Capacities

Tonnage (STPH)

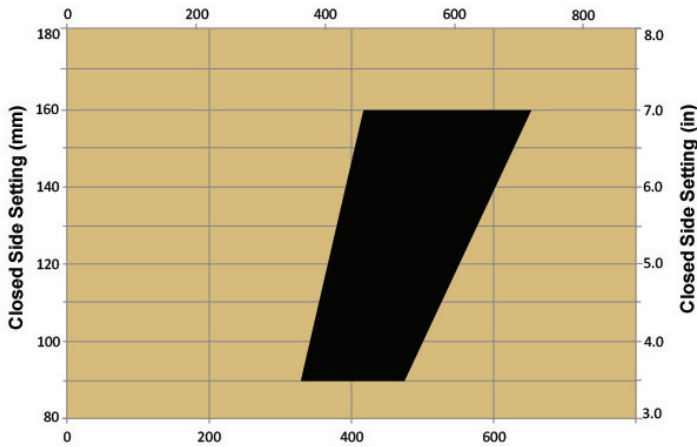


Material Density - 100 lb/ft³ (1.6 t/m³)

Tonnage (MTPH)

3258 Jaw Crusher

CSS	90 mm (3.5 in)	100 mm (4 in)	125 mm (5 in)	150 mm (6 in)	175 mm (7 in)
sph	300 - 485	315 - 485	370 - 560	410 - 630	455 - 705
mtph	270 - 440	280 - 435	335 - 500	369 - 565	410 - 635

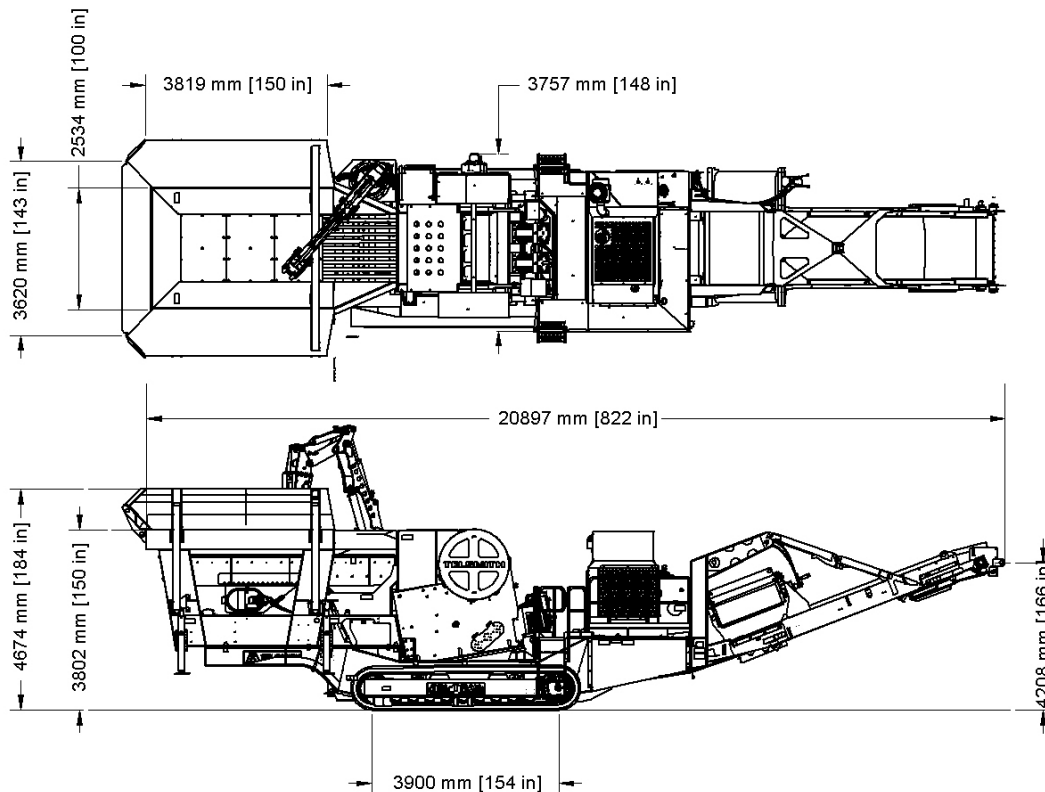

© 2013 TelSmith, Inc.